

VISS™

now you can see



VISS7500

COLOUR 5" TFT-LCD 2 WIRE VIDEO INTERCOM SYSTEM

Do you get uneasy when you or your children have to open the door for a stranger? With the VISS7500, you can see who is at the door before you open it and you can even communicate with them without having to open the door at all.

The VISS7500 video intercom system brings advanced innovative technology direct to your home or business. The unit is not only convenient to use but also has a sleek slim design. For businesses or commercial applications where access control is a concern, the system safeguards your entrance while remaining user-friendly. The VISS7500 has a 5 inch colour TFT-LCD screen that will provide you with an accurate image of the person at the door. The best part of this system is the ease of installation. With only two wires, the VISS7500 can connect to most existing doorbell wiring. The video, audio and power all run through these two wires so no additional wiring is necessary.

Home Use



Office Use



Warehouse Use



www.svat.com





VISS7500

For more information visit our website at: www.svat.com

To order, email us at sales@svat.com or call us at 1.866.946.7828

EACH VISS7500 UNIT COMES WITH:

- 1 Colour 5" TFT-LCD monitor
- 1 Colour outdoor camera
- 1 Wall Mount Bracket
- 1 AV Output Cable
- 60' Connection cable
- 1 AC/DC power adapter
- Mounting hardware
- Instruction manual
- One year warranty
- Toll free tech support
- Window warning sticker

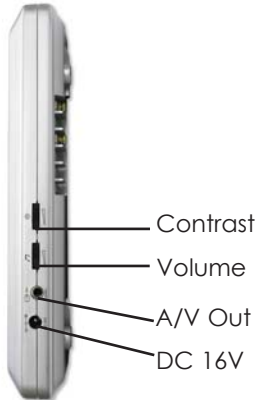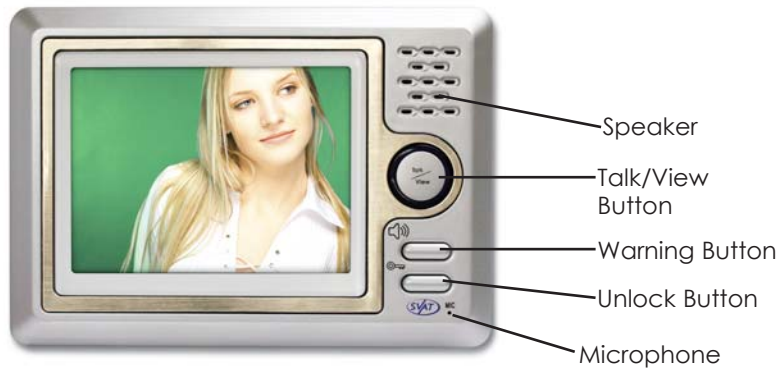

VISS™ 7500



COLOUR 5" TFT-LCD 2 WIRE VIDEO INTERCOM SYSTEM FEATURES

- Easy installation
- **Super slim monitor measures 1 inch thick**
- Two wire connection for audio, video and power (non-polarity, you can use either wire)
- High resolution of 480 dpi on the monitor and 380 TV Lines of resolution on the Camera
- 5-inch TFT-LCD colour screen
- 12-14V door strike capabilities (door strike not included, 12V for 5 seconds)
- Monitor is wall mountable
- Camera tilt can be vertically adjusted
- Maximum wiring distance of 300 feet

BENEFITS

- See who is at the door before you open it
- Children no longer have to open the door to strangers
- Decide whether or not you want to answer the door
- Unlock the door remotely for guests
- Increase the overall security for your home or business

APPLICATIONS

- Ideal use for home, office and warehouse

WEIGHT

- Mon: 1 lb Cam: 0.4 lb

DIMENSIONS

- Mon: 7.5 x 5 x 1 inch, Cam: 4.7 x 3.4 x 1.3 inches



www.svat.com
now you can see

INDOOR MONITOR

Power Supply. DC16V
 Power Consumption. 10W in operation, 0.5W standby
 Operation Temperature. . . -15 C~+50 C
 Conversation System. Bi-directional through receiver
 Calling Tone. "Ding Dong" chime
 Conversation Time. Automatic cut off after 1 minute
 Scanning Frequency. Horizontal: 15.625KHz Vertical: 50Hz
 External Dimension. 7.2(L)x5.1 (w)x1 (H)inch
 Max Wiring Distance. 300ft (Monitor to the Camera)
 Resolution. 480 x 234 dpi
 Door Strike Voltage. 12 Volts for 5 seconds

CAMERA

Power Supply. DC12V, 0.25A (supplied by monitor)
 Power Consumption. 2W in operation
 Operation Temperature. . . -15 C~+50 C
 Picture Sensor. 1/4" lens
 Imagery Angle. Diagonal: 53
 Min. Lighting. 0.1 lux at 30cm
 Infrared LED's. 6
 External Dimension. 4.7(L)x3.4(W)x1.3(H)inches
 Max Wiring Distance. 300ft (Camera to the Monitor)
 Camera Sensor. 1/4" CMOS Lens
 Resolution. 380 TV Lines